arXiv:1211.0680v1 [math.NA] 4 Nov 2012

COMPLETE ALGEBRAIC RECONSTRUCTION OF PIECEWISE-SMOOTH FUNCTIONS FROM FOURIER DATA

DMITRY BATENKOV

Abstract. In this paper we provide a reconstruction algorithm for piecewise-smooth functions from their Fourier coefficients, posessing the maximal possible asymptotic rate of convergence – including the positions of the discontinuities and the pointwise values of the function. This gives a positive answer to the so-called Eckhoff's conjecture. The vital difference of our algorithm compared to the original Eckhoff's method is that instead of consecutive Fourier coefficients, one should take ones that are evenly spaced throughout the whole sampling range.

1. Introduction

Consider the problem of reconstructing a function $f : [-\pi, \pi] \to \mathbb{R}$ from a finite number of its Fourier coefficients

$$c_k(f) \stackrel{\text{def}}{=} \frac{1}{2\pi}\int_{-\pi}^{\pi} f(t)\,\mathrm{e}^{-\imath k t}\,\mathrm{d}\,t, \qquad k = 0, 1, \dots M.$$

It is well-known that for periodic smooth functions, the truncated Fourier series

$$\mathfrak{F}_M(f) \stackrel{\text{def}}{=} \sum_{|k|=0}^{M} c_k(f)\,\mathrm{e}^{\imath k x}$$

converges to f very fast, subsequently making Fourier analysis very attractive in a vast number of applications. We have by the classical Lebesgue lemma (see e.g. [31]) that

$$\max_{-\pi \le x \le \pi} |f(x) - \mathfrak{F}_M(f)(x)| \le (3 + \ln M) \cdot E_M(f)$$

where $E_M(f)$ is the error of the best uniform approximation to f by trigonometric polynomials of degree at most M. This quantity, in turn, depends on the smoothness of the function. In particular:

(1) If f is d-times continuously differentiable (including at the endpoints) and $\left|f^{(d)}(x)\right| \le R$, then (see [40, Vol.I, Chapter 3, Theorem 13.6])

$$E_M(f) \le C_d \cdot R \cdot M^{-d}. \tag{1.1}$$

(2) If f is analytic, then by classical results of S.Bernstein (see e.g. [31, Chapter IX]) there exist constants C and $q < 1$ such that

$$E_M(f) \le C \cdot q^M. \tag{1.2}$$

Yet many realistic phenomena exhibit discontinuities, in which case the unknown function f is only piecewise-smooth. As a result, the trigonometric polynomial $\mathfrak{F}_M(f)$ no longer provides a good approximation to f due to the slow convergence of the Fourier series (one of the manifestations of this fact is commonly known as the "Gibbs phenomenon"). It has very serious implications, for example when using spectral methods to calculate solutions of PDEs with shocks. Therefore an important question arises: *"Can such piecewise-smooth functions be reconstructed from their Fourier measurements, with accuracy which is comparable to the 'classical' one (such as* (1.1) *or* (1.2)*)"?*

Date: November 6, 2012.

2000 *Mathematics Subject Classification.* Primary: 65T40; Secondary: 65D15.

Key words and phrases. Fourier inversion, nonlinear approximation, piecewise-smooth functions, Eckhoff's conjecture, Eckhoff's method, Gibbs phenomenon.

This research has been supported by the Adams Fellowship Program of the Israel Academy of Sciences and Humanities.

This problem has received much attention, especially in the last few decades ([2, 3, 4, 10, 11, 12, 13, 15, 17, 18, 19, 21, 23, 24, 26, 28, 29, 30, 32, 33, 36, 37, 38, 39] would be only a partial list). It has long been known that the key problem for Fourier series acceleration is the detection of the shock locations. Applying elementary considerations we have the following fact (see prrof in Appendix A).

Proposition 1. *Let f be piecewise d-smooth. Then no deterministic algorithm can restore the locations of the discontinuities from the first M Fourier coefficients with accuracy which is asymptotically higher than M^{-d-2}.*

Until now, the question of whether this maximal accuracy is achievable in practice remained open. In our previous work [9] we have provided an explicit reconstruction algorithm (see below) which restored the jump locations (and subsequently the pointwise values of the function between the jumps) with "half" the maximal accuracy. In the present paper we modify the method of [9] (see Algorithm 3) so that full asymptotic accuracy is achieved (Theorem 9). Thus we settle this almost 20-year old "Eckhoff's conjecture". The vital difference of the new algorithm compared to the original Eckhoff's method (and its modification from [9]) is that instead of consecutive Fourier coefficients, one should take ones that are evenly spaced throughout the whole sampling range (thus we call the new method "decimated Eckhoff's algorithm").

We describe the general approach, as well as our previous results obtained in [9], in Section 2. The modified algorithm is provided in Section 3, and its accuracy is analyzed in Section 4. Finally, some numerical experiments are presented in Section 5.

We would like to thank B.Adcock and Y.Yomdin for useful discussions.

1.1. **Notation.** The space of piecewise C^d functions on $[-\pi,\pi]$ with K jump points is denoted by $PC\left(d,K\right)$.

2. Previous work

2.1. **Eckhoff's method.** Let us first briefly describe what has become known as the Eckhoff's method for nonlinear Fourier reconstruction of piecewise-smooth functions [16, 17, 18].

Assume that f has $K>0$ jump discontinuities $\{\xi_j\}_{j=1}^K$ (they can be located also at $\pm\pi$, but not necessarily so). Furthermore, we assume that $f\in C^d$ in every segment (ξ_{j-1},ξ_j), and we denote the associated jump magnitudes at ξ_j by

$$a_{l,j}\stackrel{\text{def}}{=}f^{(l)}(\xi_j^+)-f^{(l)}(\xi_j^-).$$

We write the piecewise smooth f as the sum $f=\Psi+\Phi$, where $\Psi(x)$ is smooth and periodic and $\Phi(x)$ is a piecewise polynomial of degree d, uniquely determined by $\{\xi_j\},\{a_{i,j}\}$ such that it "absorbs" all the discontinuities of f and its first d derivatives. This idea is very old and goes back at least to A.N.Krylov ([3, 27]). Eckhoff derives the following explicit representation for $\Phi(x)$:

$$\begin{aligned}\Phi(x)&=\sum_{j=1}^{K}\sum_{l=0}^{d}a_{l,j}V_l(x;\xi_j)\\ V_n\left(x;\xi_j\right)&=-\frac{\left(2\pi\right)^n}{(n+1)!}B_{n+1}\left(\frac{x-\xi_j}{2\pi}\right)\qquad \xi_j\le x\le\xi_j+2\pi\end{aligned}\tag{2.1}$$

where $V_n\left(x;\xi_j\right)$ is understood to be periodically extended to $[-\pi,\pi]$ and $B_n(x)$ is the n-th Bernoulli polynomial. Elementary integration by parts gives the following formula.

Proposition 2. *Let $\Phi(x)$ be given by* (2.1). *For definiteness, let us assume that $c_0(\Phi)=\int_{-\pi}^{\pi}\Phi(x)\,\mathrm{d}\,x=0$. Then*

$$c_k(\Phi)=\frac{1}{2\pi}\sum_{j=1}^{K}\mathrm{e}^{-\imath k\xi_j}\sum_{l=0}^{d}(\imath k)^{-l-1}a_{l,j}.\tag{2.2}$$

Eckhoff observed that if Ψ is sufficiently smooth, then the contribution of $c_k(\Psi)$ to $c_k(f)$ is negligible **for large** k, and therefore one can hope to reconstruct the unknown parameters $\{\xi_j,a_{l,j}\}$ from the perturbed equations (2.2), where the left-hand side reads $c_k\left(f\right)\sim c_k\left(\Phi\right)$ and $k\gg1$. His proposed method was to construct from the known values

$$\left\{c_k\left(f\right)\right\}\qquad k=M-\left(d+1\right)K+1,M-\left(d+1\right)K+2,\dots,M$$

an algebraic equation satisfied by the jump points $\{\xi_1, \dots, \xi_K\}$, and solve this equation numerically. Based on some explicit computations for $d = 1, 2;\ K = 1$ and large number of numerical experiments, he conjectured that his method would reconstruct the jump locations with accuracy M^{-d-1}.

2.2. **Half-order reconstruction.** In [9] we proposed a reconstruction method based on the original Eckhoff's procedure as follows.

Algorithm 1 Half-order algorithm, [9].

Let $f \in PC(d, K)$, and assume that $f = \Phi^{(d)} + \Psi$ where $\Phi^{(d)}$ is the piecewise polynomial absorbing all discontinuities of f, and $\Psi \in C^d$. Assume in addition the following a-priori bounds:

- Minimal separation distance between the jumps
$$\min_{i \neq j} |\xi_i - \xi_j| \geq J > 0;$$
- Upper bound on jump magnitudes
$$|a_{l,j}| \leq A < \infty;$$
- Lower bound on the value of the lowest-order jump
$$|a_{0,j}| \geq B > 0;$$
- Upper bound on the size of the Fourier coefficients of Ψ:
$$|c_k(\Psi)| \leq R \cdot k^{-d-2}.$$

Let us be given the first $3M$ Fourier coefficients of f for $M > M(d, K, J, A, B, R)$ (a quantity which is computable). The reconstruction is as follows.

1. Obtain first-order approximations to the jump locations $\{\xi_1, \dots, \xi_K\}$ by Prony's method (Eckhoff's method of order 0).
2. Localize each discontinuity ξ_j by calculating the first M Fourier coefficients of the function $f_j = f \cdot h_j$ where h_j is a C^∞ bump function satisfying
   (a) $h_j \equiv 0$ on the complement of $[\xi_j - J, \xi_j + J]$;
   (b) $h_j \equiv 1$ on $\left[\xi_j - \frac{J}{3}, \xi_j + \frac{J}{3}\right]$.
3. Fix the reconstruction order $d_1 \leq \left\lfloor \frac{d}{2} \right\rfloor$. For each $j = 1, 2, \dots, K$, recover the parameters $\{\xi_j, a_{0,j}, \dots, a_{d_1,j}\}$ from the $d_1 + 2$ equations
$$c_k(f_j) = \frac{1}{2\pi} \mathrm{e}^{-\imath \xi_j k} \sum_{l=0}^{d_1} \frac{a_{l,j}}{(\imath k)^{l+1}}, \qquad k = M - d_1 - 1, M - d_1, \dots, M$$
   by Eckhoff's method for one jump (in this case we get a single polynomial equation $\left\{p_M^{d_1}(\xi_j) = 0\right\}$ of degree d_1).
4. From the previous steps we obtained approximate values for the parameters $\left\{\widetilde{\xi_j}\right\}$ and $\{\widetilde{a}_{l,j}\}$. The final approximation is taken to be
$$\widetilde{f} = \widetilde{\Psi} + \widetilde{\Phi} = \sum_{|k| \leq M} \left\{ c_k(f) - \frac{1}{2\pi} \sum_{j=1}^{K} \mathrm{e}^{-\imath \widetilde{\xi_j} k} \sum_{l=0}^{d_1} \frac{\widetilde{a}_{l,j}}{(\imath k)^{l+1}} \right\} \mathrm{e}^{\imath k x} + \sum_{j=1}^{K} \sum_{l=0}^{d_1} \widetilde{a}_{l,j} V_l(x; \widetilde{\xi_j}).$$

We have also shown that this method achieves the following accuracy.

Theorem 3 ([9]). *Let $f \in PC(d,K)$ and let $\widetilde{f}$ be the approximation of order $d_1 \leq \left\lfloor \frac{d}{2} \right\rfloor$ computed by Algorithm 1. Then*[1]

$$\begin{aligned} \left|\widetilde{\xi_j} - \xi_j\right| &\leq C_1\left(d, d_1, K, J, A, B, R\right) \cdot M^{-d_1-2}; \\ \left|\widetilde{a}_{l,j} - a_{l,j}\right| &\leq C_2\left(d, d_1, K, J, A, B, R\right) \cdot M^{l-d_1-1},\ l = 0, 1, \dots, d_1; \\ \left|\widetilde{f}(x) - f(x)\right| &\leq C_3\left(d, d_1, K, J, A, B, R\right) \cdot M^{-d_1-1}. \end{aligned} \tag{2.3}$$

The non-trivial part of the proof of this result was to analyze in detail the polynomial equation $p(\xi_j) = 0$ in step 3 of Algorithm 1. It turned out that additional orders of smoothness (namely, between d_1 and d) produced an error term which, when substituted into the polynomial p, resulted in unexpected cancellations due to which the root ξ_j was perturbed only by $O\left(M^{-d_1}\right)$. This phenomenon was first noticed by Eckhoff himself in [17] for $d = 1$, but at the time its full significance was not realized (see Section 6).

3. The decimated Eckhoff algorithm

We begin the exposition by pointing out an important property of Algorithm 1, namely that its final asymptotic convergence order essentially depends on the accuracy of step 3. It is sufficient therefore to replace this step with another method which achieves full accuracy (i.e. $\sim M^{-d-2}$) in order to obtain the overall reconstruction with full accuracy. It turns out that taking instead of consecutive Fourier samples

$$k = M - d - 1, M - d, \dots, M$$

the "decimated" section

$$k = \left\lfloor \frac{M}{(d+2)} \right\rfloor, 2\left\lfloor \frac{M}{(d+2)} \right\rfloor, \dots, M$$

does the job.

In what follows, we assume that the jumps locations ξ_j are already known with accuracy at least $O\left(M^{-2}\right)$.

Instead of the index M we shall be using

$$N \stackrel{\text{def}}{=} \left\lfloor \frac{M}{(d+2)} \right\rfloor$$

throughout and in the end we'll just switch back to M.

Denote the single jump point by $\xi \in [-\pi, \pi]$, and let $\omega = \mathrm{e}^{-\imath \xi}$.

The purpose is to recover the jump point ω and the jump magnitudes $\{a_0, \dots, a_d\}$ from the noisy measurements

$$\widetilde{c_k}(f) = \underbrace{\frac{\omega^k}{2\pi} \sum_{j=0}^{d} \frac{a_j}{(\imath k)^{j+1}}}_{\stackrel{\text{def}}{=} c_k} + \epsilon_k, \quad k = N, 2N, \dots, (d+2)N, \quad |\epsilon_k| \leq R \cdot k^{-d-2}.$$

We multiply by $(2\pi)(\imath k)^{d+1}$ and let $\alpha_j = \imath^{d+1-j} a_{d-j}$ to get

$$\widetilde{m}_k \stackrel{\text{def}}{=} 2\pi (\imath k)^{d+1} \widetilde{c_k} = \underbrace{\omega^k \sum_{j=0}^{d} \alpha_j k^j}_{\stackrel{\text{def}}{=} m_k} + \delta_k, \qquad k = N, 2N, \dots, (d+2)N, \quad |\delta_k| \leq R \cdot k^{-1}. \tag{3.1}$$

Let $z = \omega^N$. We have

$$m_{(j+1)N} = z^{j+1} \sum_{i=0}^{d} \alpha_i (j+1)^i N^i.$$

Definition 4. Let

$$p_N^d(u) \stackrel{\text{def}}{=} \sum_{j=0}^{d+1} (-1)^j \binom{d+1}{j} m_{(j+1)N} u^{d+1-j}.$$

---

[1] The last (pointwise) bound holds on "jump-free" regions.

Proposition 5. *The point $u = z$ is a root of $p_N^d(u)$.*

Proof. Combinatorial exercise. $\square$

Definition 6. Let V_N^d denote the $(d+1) \times (d+1)$ matrix

$$V_N^d \stackrel{\text{def}}{=} \begin{bmatrix} 1 & N & N^2 & \dots & N^d \\ 1 & 2N & (2N)^2 & \dots & (2N)^d \\ \vdots & \vdots & \vdots & \vdots & \vdots \\ 1 & (d+1)N & ((d+1)N)^2 & \dots & ((d+1)N)^d \end{bmatrix}.$$

Proposition 7. *The vector of exact magnitudes $\{\alpha_j\}$ satisfies*

$$\begin{bmatrix} m_N \omega^{-N} \\ m_{2N} \omega^{-2N} \\ \vdots \\ m_{(d+1)N} \omega^{-(d+1)N} \end{bmatrix} = V_N^d \begin{bmatrix} \alpha_0 \\ \alpha_1 \\ \vdots \\ \alpha_d \end{bmatrix}. \tag{3.2}$$

Algorithm 2 Recovery of single jump parameters

Let there be given the first $N \gg 1$ Fourier coefficients of the function f_j, and assume that the jump position ξ is already known with accuracy $O\left(N^{-2}\right)$.

(1) Construct the polynomial

$$q_N^d(u) \quad = \quad \sum_{j=0}^{d+1} (-1)^j \binom{d+1}{j} \widetilde{m}_{(j+1)N} u^{d+1-j}.$$

from the given noisy measurements $\widetilde{m}_N, \widetilde{m}_{2N}, \dots, \widetilde{m}_{(d+2)N}$ (3.1).

(2) Find the root $\widetilde{z}$ which is closest to the unit circle (in fact any root will do, see Remark 18 below).

(3) Take $\widetilde{\omega} = \sqrt[N]{\widetilde{z}}$. Note that in general there are N possible values on the unit circle, but since we already know the approximate location of ω the correct value can be chosen consistently.

(4) Recover $\widetilde{\xi} = -\arg \widetilde{\omega}$.

(5) To recover the magnitudes, solve the linear system (3.2).

To see that there are N possible solutions, notice that

$$\begin{aligned} e^{\imath \xi N} &= e^{\imath t} \\ \xi N - t &= 2\pi n \\ \xi &= \frac{t}{N} + \frac{2\pi}{N} n, \qquad n \in \mathbb{Z}. \end{aligned}$$

Algorithm 3 Full accuracy Fourier approximation

Let $f \in PC(d, K)$, and assume that $f = \Phi^{(d)} + \Psi$ where $\Phi^{(d)}$ is the piecewise polynomial absorbing all discontinuities of f, and $\Psi \in C^d$. Assume the a-priori bounds as in Algorithm 1.

(1) Using Algorithm 1, obtain approximate values of the jumps (up to accuracy $O\left(N^{-\left\lfloor \frac{d}{2} \right\rfloor}\right)$) and the Fourier coefficients of the functions f_j.

(2) Use Algorithm 2 to further improve the accuracy of reconstruction.

4. ACCURACY ANALYSIS

Theorem 8. *Algorithm 2 recovers the parameters of a single jump from the given noisy measurements* (3.1) *with the following accuracy:*

$$\begin{aligned} \left|\widetilde{\xi}-\xi\right| &\leq C_4 \frac{R}{B} N^{-d-2}, \\ \left|\widetilde{\alpha}_j-\alpha_j\right| &\leq C_5 R\left(1+\frac{A}{B}\right) N^{-j-1}, \qquad j=0,1,\ldots,d. \end{aligned}$$

An immediate consequence is the resolution of Eckhoff's conjecture.

Theorem 9. *Let $f \in PC(d,K)$ and let $\widetilde{f}$ be the approximation of order d computed by Algorithm 3. Then*

$$\begin{aligned} \left|\widetilde{\xi}_j-\xi_j\right| &\leq C_6(d,K,J,A,B,R) \cdot M^{-d-2}; \\ \left|\widetilde{a}_{l,j}-a_{l,j}\right| &\leq C_7(d,K,J,A,B,R) \cdot M^{l-d-1}, \qquad l=0,1,\ldots,d; \\ \left|\widetilde{f}(x)-f(x)\right| &\leq C_8(d,K,J,A,B,R) \cdot M^{-d-1}. \end{aligned} \tag{4.1}$$

The remainder of this section is devoted to proving Theorem 8.

Let us first define an auxiliary polynomial sequence.

Definition 10. For all i,d nonnegative integers let

$$s_i^d(w) \stackrel{\text{def}}{=} \sum_{j=0}^{d+1} (-1)^j \binom{d+1}{j} (j+1)^i w^{d+1-j}.$$

Lemma 11. *The polynomial $s_d^d(w)$ has all positive real and simple roots.*

Proof. We have the following recursion (proof is straightforward):

$$s_{i+1}^d(w) = (d+2)\, s_i^d(w) - w \frac{\mathrm{d}}{\mathrm{d}\, w} s_i^d(w).$$

Now apply [34, Vol. 2, Part 5, Problem 66] with necessary modifications in order to show that the successive application of the recurrence to $s_0^d(w) = (w-1)^{d+1}$ does not introduce new multiple roots (but rather decreases the multiplicity of $w=1$). □

By applying Sturm's theorem on the interval $(0,+\infty)$ and using the fact that $\frac{\mathrm{d}}{\mathrm{d}\, w} s_i^d(w) = (d+1)\, s_i^{d-1}(w)$ we also get the following result.

Corollary 12. *All the polynomials $s_i^d(w)$ with $i \geq d$ have positive real and simple roots. The sequence $\left\{s_d^d, s_d^{d-1}, \ldots, s_d^0\right\}$ is a Sturm sequence.*

Proposition 13. *Let $u = zw$ (recall that $z = \omega^N$). Then the polynomial $p_N^d(u)$ satisfies*

$$p_N^d(zw) = z^{d+2} \sum_{i=0}^{d} \alpha_i N^i s_i^d(w). \tag{4.2}$$

Proof. Straightforward. □

Now let $\{u_1 = z, \ldots, u_d\}$ denote the roots of $p_N^d(u)$, and $\{w_1 = 1, \ldots, w_d\}$ denote the roots of $s_d^d(w)$.

Corollary 14. *The distance between the $\{u_1, \ldots, u_d\}$ remains $O(1)$ as $N \to \infty$.*

Proof. Consider the decomposition (4.2). By Lemma 11, $\{w_1, \ldots, w_d\}$ are positive, real and simple roots of $s_d^d(w)$. By Rouche's theorem, as $N \to \infty$ the roots of $\frac{1}{N^d} p_N^d(zw)$ converge to $\{w_1, \ldots, w_d\}$. Obviously the polynomials $\frac{1}{N^d} p_N^d(zw)$ and $p_N^d(zw)$ have the same roots. □

Proposition 15. *The derivative of $p_N^d(u)$ at $u_1 = z$ is equal to $(d+1)! N^d \alpha_d z^{d+1}$.*

Proof. This is a combinatorial exercise. □

Proposition 16. *The asymptotic estimate* $\left|\frac{\mathrm{d}}{\mathrm{d}\,u} p_N^d(u)\,|_{u=u_i}\right| \sim |\alpha_d|\,N^d$ *holds for all* $\{u_i\}$.

Proof. Use the decomposition (4.2). ☐

Now we can estimate the deviation of the roots of q_N^d from $\{u_1,\dots,u_d\}$.

Lemma 17. *Denote by* $\{y_1,\dots,y_d\}$ *the roots of* q_N^d. *Then there exists* C_9 *such that for* $N \gg 1$ *and for* $j = 1,2,\dots,d$

$$|y_j - u_j| \leq C_9 \frac{R}{B} N^{-d-1}.$$

Proof. By Proposition 16 there exists a constant C_{10} such that

$$\left|\frac{\mathrm{d}}{\mathrm{d}\,u} p_N^d(u)\,|_{u=u_i}\right| \geq C_{10} B N^d.$$

Now again from (4.2) it is easy to see that the second derivative of p_N^d at $\{u_1,\dots,u_d\}$ is bounded: for some constant C_{11} we have

$$\left|\frac{\mathrm{d}^2}{\mathrm{d}\,u^2} p_N^d(u)\,|_{u=u_i}\right| \leq C_{11} A N^d.$$

Take disks of radius $\eta(N) = C_9 \frac{R}{B} N^{-d-1}$ around each root u_i (where C_9 is to be determined). By a straightforward application of Taylor's theorem (see e.g. [9, Lemma A.6]) we therefore have that

$$\left|p_N^d(u_i + \eta(N))\right| \geq C_{12} B \eta(N) N^d = C_{12} C_9 R N^{-1}.$$

Now consider the perturbation polynomial $e_N^d \overset{\text{def}}{=} q_N^d - p_N^d$. Its coefficients have magnitudes $\left|\widetilde{m_{jN}} - m_{jN}\right| \leq R N^{-1}$. Therefore

$$\left|e_N^d(u_i + \eta(N))\right| \leq C_{13} R N^{-1}.$$

Note that for $N \gg 1$ the constant C_{13} does not depend on C_9 because, say, $|u_i + \eta(N)| \leq 2|u_i| < C^\sharp(d)$.

Consequently, if we choose $C_9 > \frac{C_{13}}{C_{12}}$ we can apply Rouche's theorem and conclude that q_N^d has a simple zero within distance $C_9 \frac{R}{B} N^{-d-1}$ from u_i.

By Corollary 14 the $\{u_i\}$ are $O(1)$-separated, therefore if N is large enough than the quantity $C_9 \frac{R}{B} N^{-d-1}$ will be smaller than the minimal separation distance. ☐

Remark 18. This analysis is valid for *any root* of q_N^d, not just the perturbation of $u_1 = z$. The roots of q_N^d all lie approximately on the ray with angle ξN. This means that the parameter ξ can be recovered with high accuracy from any root of $q_N^d(u)$, and we expect that it might be important for practice (so for instance one can approximate ξ by averaging).

Proof of Theorem 8, first part. By Lemma 17, the accuracy of step 2 is bounded by $C_9 \frac{R}{B} N^{-d-1}$. Extraction of N-th root in step 3 further increases the accuracy by the factor $\frac{1}{N}$. As mentioned above, this operation introduces multiple-valuedness which can be circumvented by assuming that we know a-priori sufficiently close approximation to the true root ξ (sufficiently close here should mean at least $O\left(N^{-2}\right)$). Step 4 preserves this estimate (by Taylor expanding of $\log(1+\varepsilon)$). ☐

Proof of Theorem 8, second part. We have recovered the approximate value $\widetilde{\omega}_N$ which satisfies $|\widetilde{\omega}_N - \omega| \leq C_4 \frac{R}{B} N^{-d-2}$, while $|\widetilde{m}_k - m_k| \leq R k^{-1}$.

The error vector satisfies

$$\begin{bmatrix} \widetilde{\alpha}_0 - \alpha_0 \\ \widetilde{\alpha}_1 - \alpha_1 \\ \vdots \\ \widetilde{\alpha}_d - \alpha_d \end{bmatrix} = \left(V_N^d\right)^{-1} \begin{bmatrix} \widetilde{m}_N \widetilde{\omega}_N^{-N} - m_N \omega^{-N} \\ \widetilde{m}_{2N} \widetilde{\omega}_N^{-2N} - m_{2N} \omega^{-2N} \\ \vdots \\ \widetilde{m}_{(d+1)N} \widetilde{\omega}_N^{-(d+1)N} - m_{(d+1)N} \omega^{-(d+1)N} \end{bmatrix}.$$

It is immediate that

$$V_N^d = V_1^d \operatorname{diag}\left\{1, N, \dots, N^d\right\}.$$

Since

$$\begin{aligned}
|m_{jN}| &\leq C_{14} A N^{d}\\
\widetilde{m_{jN}} &= m_{jN} + R(N) N^{-1}, \qquad R(N) \leq R\\
\widetilde{\omega}_N &= \omega + C_4(N) \frac{R}{B} N^{-d-2}, \qquad C_4(N) \leq C_4
\end{aligned}$$

then we have (using standard Taylor majorization techniques, see e.g. [9, Proposition A.7]) that

$$\begin{aligned}
\widetilde{\omega}_N^{-jN} &= \left(\omega + C_4(N) \frac{R}{B} N^{-d-2}\right)^{-jN}\\
&= \omega^{-jN} \left(1 + \frac{C_4(N) R}{B\omega} N^{-d-2}\right)^{-jN}\\
& \omega^{-jN} \left(1 - C_{15}(N) \frac{R}{B} N^{-d-1}\right)
\end{aligned}$$

and consequently

$$\left|\widetilde{m}_{jN} \widetilde{\omega}_N^{-jN} - m_{jN} \omega^{-jN}\right| \leq C_{16} R \left(1 + \frac{A}{B}\right) N^{-1}. \tag{4.3}$$

Denote $\zeta_j = \widetilde{m}_{jN} \widetilde{\omega}_N^{-jN} - m_{jN} \omega^{-jN}$ and also $C_{17} \stackrel{\text{def}}{=} \| \left(V_1^d\right)^{-1} \|$. Since

$$\begin{bmatrix} \widetilde{\alpha}_0 - \alpha_0 \\ \widetilde{\alpha}_1 - \alpha_1 \\ \vdots \\ \widetilde{\alpha}_d - \alpha_d \end{bmatrix} = \begin{bmatrix} 1 & & & \\ & N^{-1} & & \\ & & \ddots & \\ & & & N^{-d} \end{bmatrix} \left(V_1^d\right)^{-1} \begin{bmatrix} \zeta_0 \\ \zeta_1 \\ \vdots \\ \zeta_d \end{bmatrix}$$

and using the estimate (4.3) we have immediately that for $j = 0, 1, \dots, d$

$$|\widetilde{\alpha}_j - \alpha_j| \leq C_5 R \left(1 + \frac{A}{B}\right) N^{-j-1}$$

where $C_5 \stackrel{\text{def}}{=} C_{16} C_{17}$. This completes the proof of Theorem 8. □

5. Numerical experiments

In our numerical experiments we compared the performance of the following Eckhoff-based methods for recovery of a single jump point position from the first M Fourier coefficients: original Eckhoff's formulation from [17] (Eckhoff); our previous method from [9] (Half); the method presented in this paper (Full). All the three methods in essense solve a polynomial equation $p_M(u) = 0$ satisfied by the jump point $\omega = \mathrm{e}^{-\imath \xi}$: for Eckhoff and Half this polynomial is constructed from consecutive samples $k = M - d - 1, \dots, M$ (Algorithm 1), while Full uses the decimated sequence $k = N, 2N, \dots, M$. The only difference between Eckhoff and Half is the degree of $p_M(u)$: the former uses the full smoothness d while the latter uses $d_1 = \left\lfloor \frac{d}{2} \right\rfloor$.

All calculations were done using Mathematica software with high-precision setting. The results, presented in Figure 5.1 on page 9, agree well with the theory - Full presents an improvement of $\sim M^{-d/2}$ compared to Half, and improvement of order M^{-d} compared to Eckhoff.

6. Discussion

Eckhoff's original conjecture related exclusively to his own method (for $k = M - (d+2) K, \dots, M$) while assuming maximal possible reconstruction order. As stated by him in [17] it is false because in the general case there is no cancellation (as is evident also from our experiments). Eckhoff himself clearly knew about

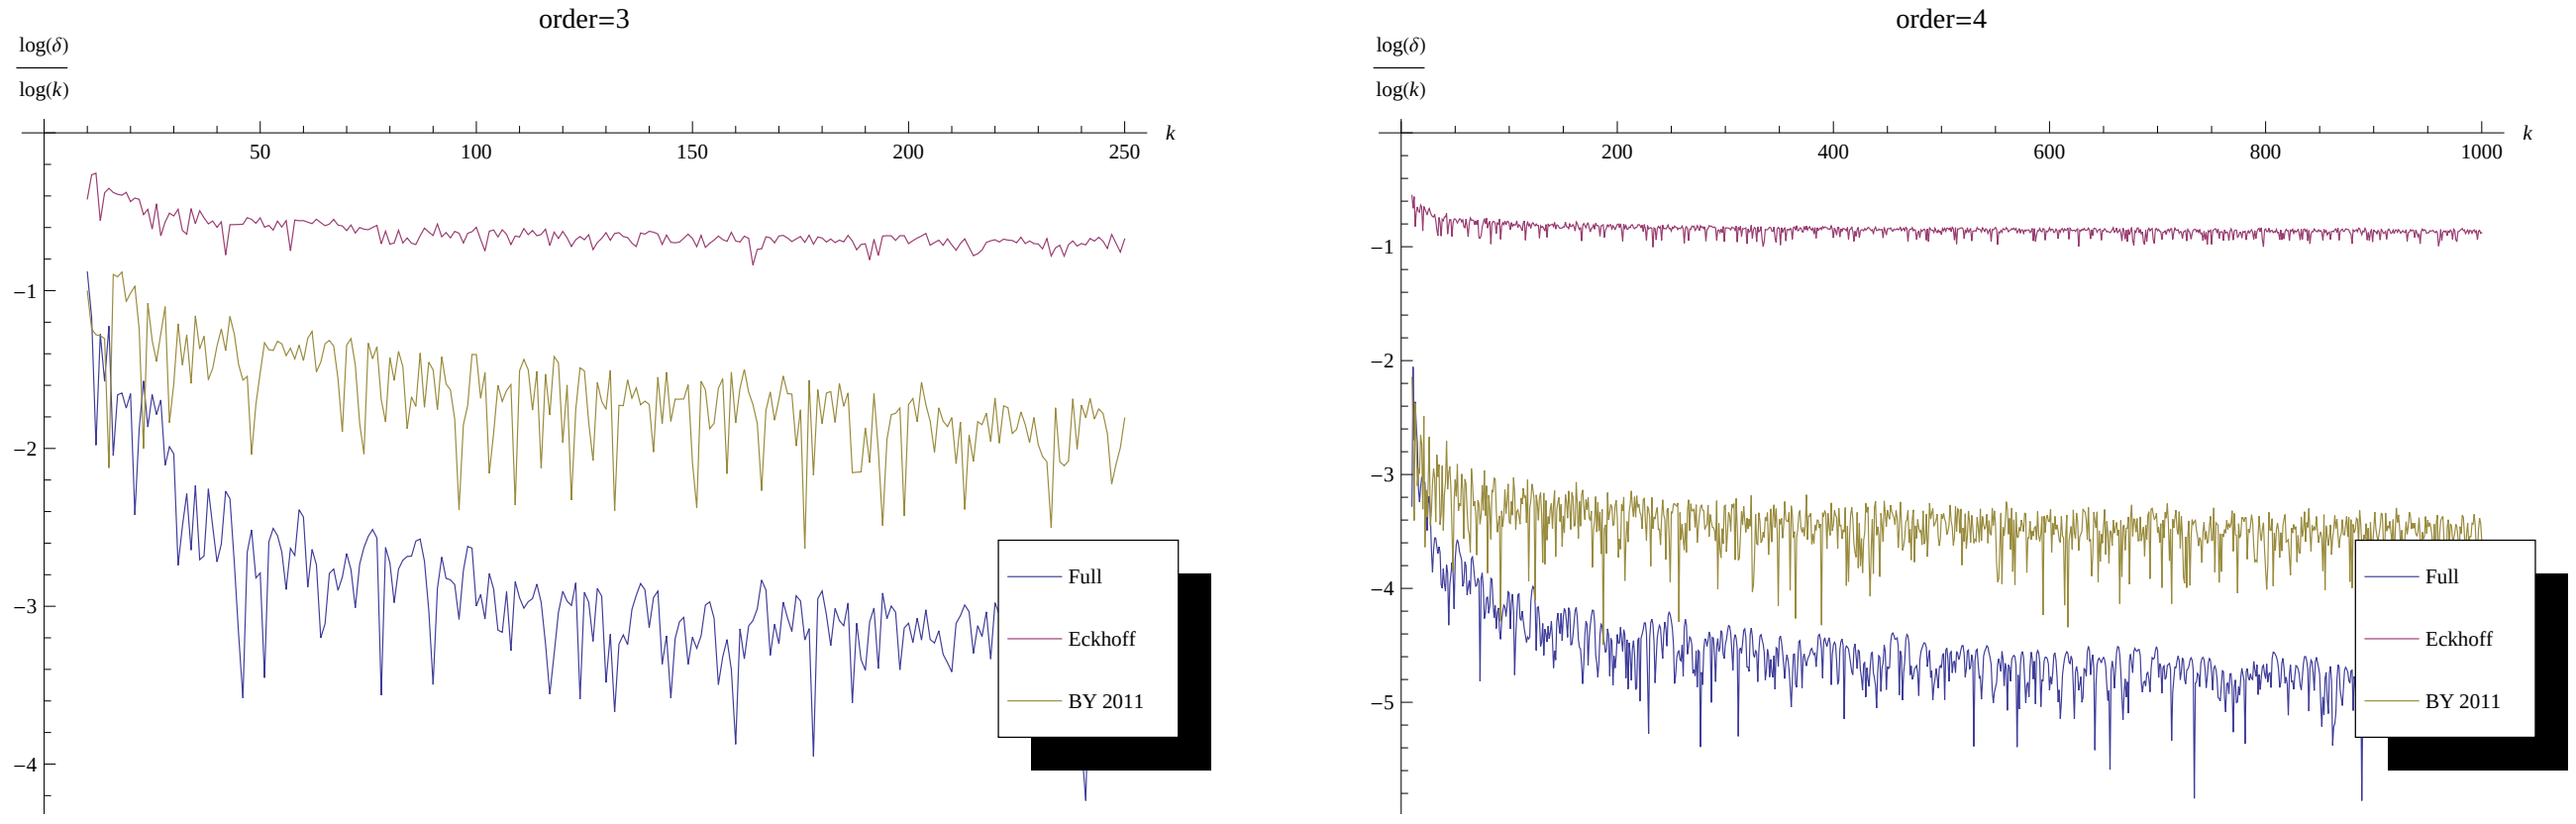

(A) Order=3 (B) Order=4

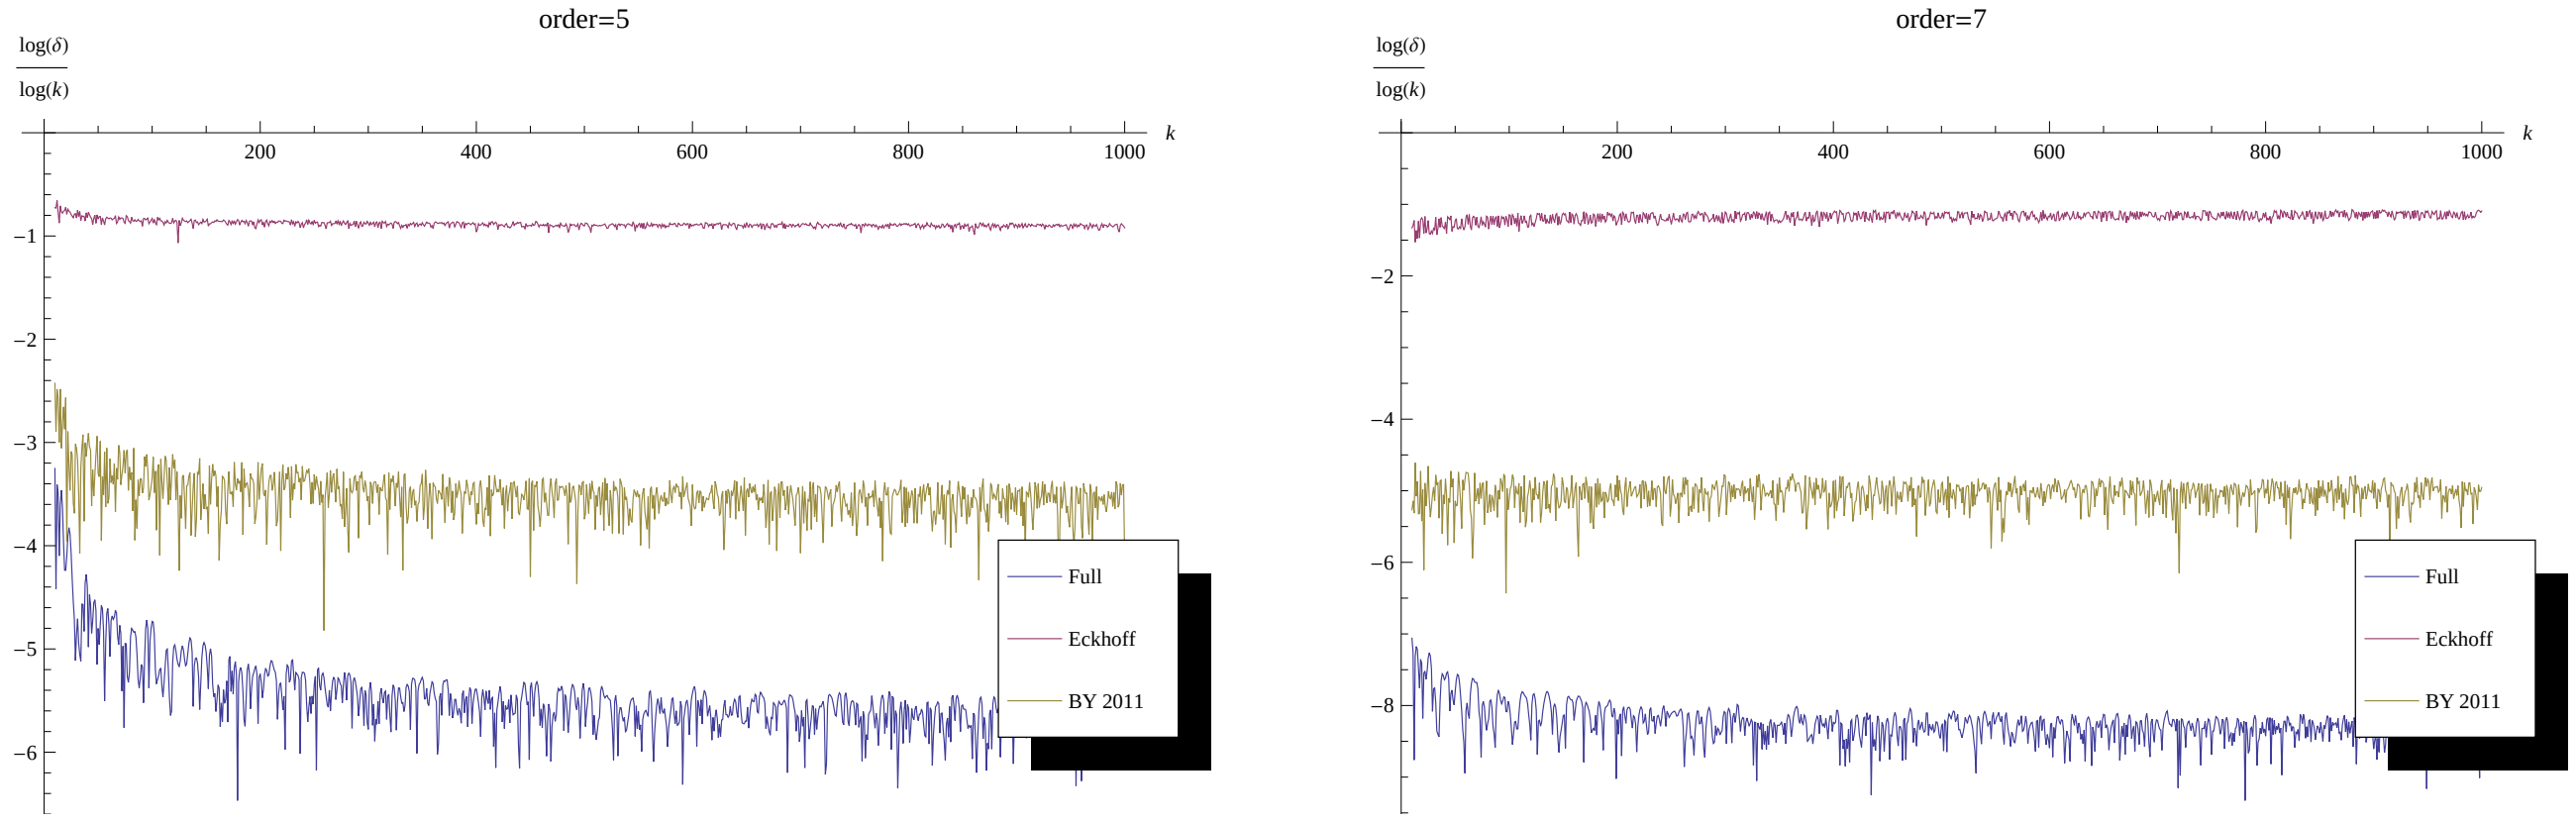

(C) Order=5 (D) Order=7

FIGURE 5.1. Fixed order reconstruction. FULL represents the algorithm of this paper, BY 2011 referes to the method of [9] while ECKHOFF denotes the original method of Eckhoff from [17].

the cancellation phenomena for $d = 1$ (as is evident from the explicit calculations in [17]), but he apparently failed to generalize it correctly for higher values of d. [2]

While both [9] and the present paper describe a real phenomena of accleration of convergence, we are yet to find a fundamental mathematical reason which could somehow explain these phenomena. We believe that such an explanation could be based on the description of the so-called "Prony map" – in particular the geometry of its image. We have started this investigation in [8], and we hope to get additional insights in that direction following the results of the present paper. In particular, we would like to determine whether applying efficient algorithms for solving Prony-type systems can eliminate the need for localization via convolution (as we noted in [9] the localization step is currently not easy to implement in practice).

In a related line of investigation, it would be natural to attempt apply the decimation technique to other reconstruction problems in algebraic sampling, such as reconstruction from moments, finite rate of innovation and others ([5, 7, 14, 20, 22, 25, 35]).

There appears to be a natural way to generalize the 1D algorithm to higher dimensions, by a technique similar to [6]. We plan to present results in this direction separately.

---

[2] These unfortunate shortcomings may be partially attributed to the fact that in his experiments he chose to reconstruct functions which were essentially either exact piecewise-polynomials or real analytic functions – cases in which the cancellation phenomenon always appears.

An "Eckhoff conjecture for the analytic case" (recall (1.2)) appears to be still open (but see a recent work [1]). One natural line of attack would be to analyze how the constants appearing in the accuracy estimates depend on the smoothness order d.

Appendix A. Maximal accuracy for jumps

Proof of Proposition 1. Consider the following subset of the space $PC\left(d,K\right)$

$$B\left(A,R\right)=\left\{f\in PC\left(d,K\right):\ f=\Phi^{(d)}+\Psi;\ \left|c_k\left(\Psi\right)\right|<R\cdot k^{-d-2};\ \sum_{l,j}\left|a_{l,j}\right|<A\right\}$$

where the smooth part Ψ is in C^d and the quantities $\{a_{l.j}\}$ denote the associated jump magnitudes of the piecewise polynomial $\Phi^{(d)}$ whose degree is d. It is sufficient to show that there exists an absolute constant C such that for every index M there exist two functions $g_M,h_M\in B\left(A,R\right)$ whose first M Fourier coefficients coincide, while the corresponding jump locations differ by CM^{-d-2}. Once we show this, it is clear that no deterministic algorithm will be able to reconstruct the jump locations of all functions in $B\left(A,R\right)$ with accuracy essentially better than $O\left(M^{-d-2}\right)$.

Take $g_M=g$ to be a fixed piecewise polynomial $\Phi^{(d)}$ with jumps $\{\xi_1,\dots,\xi_K\}$ and associated jump magnitudes $\{a_{l,j}\}$, satisfying $\sum_{l,j}\left|a_{l,j}\right|<A$. Obviously $g\in B\left(A,R\right)$. Denote $\delta=CM^{-d-2}$ where C is to be determined. Let $\Phi_M^{(d)}$ denote another piecewise polynomial of degree d with jumps

$$\{\eta_1=\xi_1+\delta,\dots,\eta_K=\xi_K+\delta\}$$

and the same jump magnitudes $\{a_{l,j}\}$ as those of $\Phi^{(d)}$. Let

$$a_k=c_k\left(\Phi^{(d)}-\Phi_M^{(d)}\right).$$

Finally take

$$h_M\left(x\right)\overset{\text{def}}{=}\Phi_M^{(d)}\left(x\right)+\sum_{k=0}^{M}a_k\,\mathrm{e}^{\imath kx}.$$

Clearly $c_k\left(g_M\right)=c_k\left(h_M\right)$ for $k=0,1,\dots,M$. In order to ensure that $h_M\in B\left(A,R\right)$ we need to choose C small enough such that

$$\left|a_k\right|\le R\cdot k^{-d-2};\qquad k=1,2,\dots,M.$$

It turns out that $C\overset{\text{def}}{=}\frac{R}{A}$ will fit just fine. Indeed:

$$\begin{aligned}a_k=c_k\left(\Phi^{(d)}-\Phi_M^{(d)}\right)&=\frac{1}{2\pi}\sum_{j=1}^{K}\mathrm{e}^{-\imath\xi_j k}\sum_{l=0}^{d}\frac{a_{l,j}}{\left(\imath k\right)^{l+1}}-\frac{1}{2\pi}\sum_{j=1}^{K}\mathrm{e}^{-\imath\eta_j k}\sum_{l=0}^{d}\frac{a_{l,j}}{\left(\imath k\right)^{l+1}}\\&=\left(\mathrm{e}^{\imath\delta k}-1\right)\frac{1}{2\pi}\sum_{j=1}^{K}\mathrm{e}^{-\imath\eta_j k}\sum_{l=0}^{d}\frac{a_{l,j}}{\left(\imath k\right)^{l+1}}.\end{aligned}$$

Now obviously

$$\left|\frac{1}{2\pi}\sum_{j=1}^{K}\mathrm{e}^{-\imath\eta_j k}\sum_{l=0}^{d}\frac{a_{l,j}}{\left(\imath k\right)^{l+1}}\right|\le\frac{A}{2\pi k}.$$

From geometric considerations we have $\left|1-\mathrm{e}^{\imath\delta k}\right|\le\delta k$, therefore

$$\left|a_k\right|\le\frac{A}{2\pi k}\delta k=\frac{A}{2\pi}CM^{-d-2}=\frac{A}{2\pi}\cdot\frac{R}{A}\cdot M^{-d-2}<RM^{-d-2}.$$

This completes the proof. □

References

[1] B. Adcock, A.C. Hansen, and A. Shadrin. A stability barrier for reconstructions from Fourier samples. *arXiv preprint arXiv:1210.7831*, 2012.

[2] N.S. Banerjee and J.F. Geer. Exponentially accurate approximations to periodic Lipschitz functions based on Fourier series partial sums. *Journal of Scientific Computing*, 13(4):419–460, 1998.

[3] A. Barkhudaryan, R. Barkhudaryan, and A. Poghosyan. Asymptotic behavior of Eckhoff's method for Fourier series convergence acceleration. *Analysis in Theory and Applications*, 23(3):228–242, 2007.

[4] P. Barone and R. March. Reconstruction of a Piecewise Constant Function from Noisy Fourier Coefficients by Padé Method. *SIAM Journal on Applied Mathematics*, 60(4):1137–1156, 2000.

[5] D. Batenkov. Moment inversion problem for piecewise D-finite functions. *Inverse Problems*, 25(10):105001, October 2009.

[6] D. Batenkov, V. Golubyatnikov, and Y. Yomdin. Reconstruction of Planar Domains from Partial Integral Measurements. In *Proc. Complex Analysis & Dynamical Systems V*, 2011.

[7] D. Batenkov, N. Sarig, and Y. Yomdin. An "algebraic" reconstruction of piecewise-smooth functions from integral measurements. *Functional Differential Equations*, 19(1-2):9–26, 2012.

[8] D. Batenkov and Y. Yomdin. On the accuracy of solving confluent Prony systems. *To appear in SIAM J.Appl.Math.* Arxiv preprint arXiv:1106.1137.

[9] D. Batenkov and Y. Yomdin. Algebraic Fourier reconstruction of piecewise smooth functions. *Mathematics of Computation*, 81:277–318, 2012.

[10] R. Bauer. *Band filters for determining shock locations.* PhD thesis, Department of Applied Mathematics, Brown University, Providence, RI, 1995.

[11] B. Beckermann, A.C. Matos, and F. Wielonsky. Reduction of the Gibbs phenomenon for smooth functions with jumps by the ε-algorithm. *Journal of Computational and Applied Mathematics*, 219(2):329–349, 2008.

[12] John P. Boyd. Acceleration of algebraically-converging fourier series when the coefficients have series in powers of 1/n. *Journal of Computational Physics*, 228(5):1404 – 1411, 2009.

[13] C. Brezinski. Extrapolation algorithms for filtering series of functions, and treating the Gibbs phenomenon. *Numerical Algorithms*, 36(4):309–329, 2004.

[14] P.L. Dragotti, M. Vetterli, and T. Blu. Sampling Moments and Reconstructing Signals of Finite Rate of Innovation: Shannon meets Strang-Fix. *IEEE Transactions on Signal Processing*, 55(5):1741, 2007.

[15] T.A. Driscoll and B. Fornberg. A Padé-based algorithm for overcoming the Gibbs phenomenon. *Numerical Algorithms*, 26(1):77–92, 2001.

[16] K.S. Eckhoff. Accurate and efficient reconstruction of discontinuous functions from truncated series expansions. *Mathematics of Computation*, 61(204):745–763, 1993.

[17] K.S. Eckhoff. Accurate reconstructions of functions of finite regularity from truncated Fourier series expansions. *Mathematics of Computation*, 64(210):671–690, 1995.

[18] K.S. Eckhoff. On a high order numerical method for functions with singularities. *Mathematics of Computation*, 67(223):1063–1088, 1998.

[19] S. Engelberg and E. Tadmor. Recovery of edges from spectral data with noise - a new perspective. *SIAM Journal on Numerical Analysis*, 46(5):2620–2635, 2008.

[20] B. Ettinger, N. Sarig, and Y. Yomdin. Linear versus Non-Linear Acquisition of Step-Functions. *Journal of Geometric Analysis*, 18(2):369–399, 2008.

[21] A. Gelb and E. Tadmor. Detection of edges in spectral data. *Applied and computational harmonic analysis*, 7(1):101, 1999.

[22] G.H. Golub, P. Milanfar, and J. Varah. A Stable Numerical Method for Inverting Shape from Moments. *SIAM Journal on Scientific Computing*, 21(4):1222–1243, 2000.

[23] D. Gottlieb and C.W. Shu. On the Gibbs phenomenon and its resolution. *SIAM Review*, pages 644–668, 1997.

[24] C. Guilpin, J. Gacougnolle, and Y. Simon. The ε-algorithm allows to detect Dirac delta functions. *Applied Numerical Mathematics*, 48(1):27–40, 2004.

[25] B. Gustafsson, C. He, P. Milanfar, and M. Putinar. Reconstructing planar domains from their moments. *Inverse Problems*, 16(4):1053–1070, 2000.

[26] T. Hrycak and K. Gröchenig. Pseudospectral Fourier reconstruction with the modified Inverse Polynomial Reconstruction Method. *Journal of Computational Physics*, 229(3):933–946, 2010.

[27] L.V. Kantorovich and V.I. Krylov. *Approximate methods of higher analysis: by LV Kantorovich and VI Krylov. Translated by Curtis D. Benster.* Interscience Publishers, 1958.

[28] G. Kvernadze. Approximating the jump discontinuities of a function by its Fourier-Jacobi coefficients. *Mathematics of Computation*, 73(246):731–752, 2004.

[29] G. Kvernadze. Approximation of the discontinuities of a function by its classical orthogonal polynomial Fourier coefficients. *Math. Comp*, 79:2265–2285, 2010.

[30] HN Mhaskar and J. Prestin. Polynomial frames for the detection of singularities. In *Wavelet Analysis and Multiresolution Methods: Proceedings of the Conference Held at University of Illinois at Urbana-Champaign, Illinois*, page 273. CRC, 2000.

[31] I.P. Natanson. *Constructive Function Theory (in Russian).* Gostekhizdat, 1949.

[32] A. Poghosyan. Asymptotic behavior of the Eckhoff method for convergence acceleration of trigonometric interpolation. *Analysis in Theory and Applications*, 26(3):236–260, 2010.

[33] A. Poghosyan. On an auto-correction phenomenon of the Krylov–Gottlieb–Eckhoff method. *IMA Journal of Numerical Analysis*, 31(2):512, 2011.
[34] G. Pólya and G. Szegîo. Problems and theorems in analysis, 1972.
[35] N. Sarig and Y. Yomdin. Signal Acquisition from Measurements via Non-Linear Models. *Mathematical Reports of the Academy of Science of the Royal Society of Canada*, 29(4):97–114, 2008.
[36] B.D. Shizgal and J.H. Jung. Towards the resolution of the Gibbs phenomena. *Journal of Computational and Applied Mathematics*, 161(1):41–65, 2003.
[37] A. Solomonoff. Reconstruction of a discontinuous function from a few Fourier coefficients using Bayesian estimation. *Journal of Scientific Computing*, 10(1):29–80, 1995.
[38] E. Tadmor. Filters, mollifiers and the computation of the Gibbs phenomenon. *Acta Numerica*, 16:305–378, 2007.
[39] M. Wei, A.G. Martínez, and A.R. De Pierro. Detection of edges from spectral data: New results. *Applied and Computational Harmonic Analysis*, 22(3):386–393, 2007.
[40] A. Zygmund. *Trigonometric Series. Vols. I, II.* Cambridge University Press, New York, 1959.

Department of Mathematics, Weizmann Institute of Science, Rehovot 76100, Israel
E-mail address: `dima.batenkov@weizmann.ac.il`
URL: `http://www.wisdom.weizmann.ac.il/~dmitryb`